


8" APERTURE WALLWASH FLUORESCENT



FEATURES

- Low brightness horizontal lamp housing
- Die cast aluminum plaster frame
- Junction box rated for four #12AWG through branch circuits 90° wiring
- Ventilated socket housing
- .050" thick high-purity aluminum reflector
- Maximum ceiling thickness 1.0"
- 25" hanger bars included, adjust 2.5"
- Class P electronic, sound rating: A, HPF magnetic or electronic 10% THD
- Ballast includes end-of-life protection relay and meets FCC requirements for EMI/RFI installations
- Economical quad tube lamps (included)

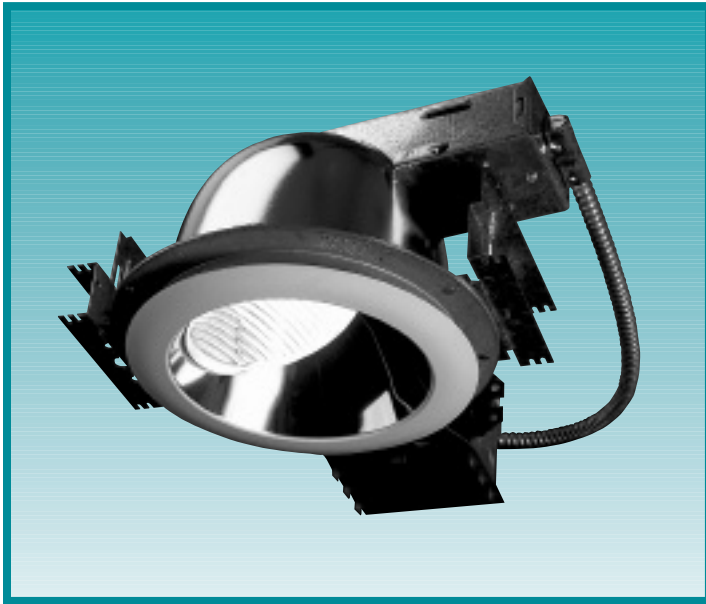

Fixture Specifications

ORDERING INFORMATION

SAMPLE CATALOG NUMBER

W 8 2 XXXXX XXXV XXX
 Series Aperture Size Number of Lamps Lamp Wattage/Ballast Voltage Options

SERIES

W 8" Compact fluorescent quad tube wallwash

APERTURE SIZE

8 8" Aperture

NUMBER OF LAMPS

2 Two horizontal mounted compact fluores.

LAMP WATTAGE & BALLAST

13HPF 13 watt quad tube (GX23-2) HPF magnet.
13E 13 watt quad tube (G24q-1) electronic
18HPF 18 watt quad tube (G24d-2) HPF magnet.
18E 18 watt quad tube (G24q-2) electronic
26HPF 26 watt quad tube (G24d-3) HPF magnet.
26E 26 watt quad tube (G24q-3) electronic

VOLTAGE


120V 120 volt
277V 277 volt

OPTIONS

DIM' Electronic Dimming Ballast
EM Emergency Battery Pack

¹ Generic two-wire line voltage control, 5-100% available for 26 & 32 watt only.

DIMENSIONS

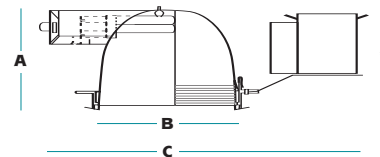

A	B	C
6.6"	7.0"	17.0"

NOTE: Maximum width = 12.625".
 EM option maximum width = 15.312".
 Ceiling cutout = 8.5".
 Trim ring outside diameter = 9.5".

TRIM ORDERING INFORMATION

damp location listed

Catalog Number	Description
4480W	Low iridescent specular clear lensed w/ white painted self flange trim
4481W	Specular gold lensed w/ white painted self flange trim
4486W	Low iridescent, ultra low brightness specular lensed w/ white painted self flange trim



4480W



4481W



4486W



A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

www.securitylighting.com

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642