


R SERIES 2X4



The R Series is the economical yet bright and clean choice for fluorescent general lighting applications. Ideally suited for retail, commercial, office, storage, and restaurant lighting.

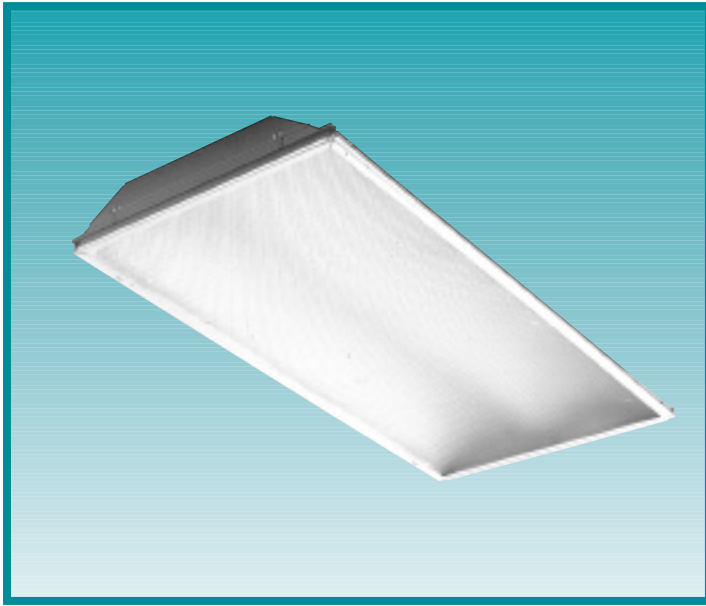


Fixture Specifications

FEATURES

- Flush steel door
- Ballasts are thermally protected, resetting, Class P, Sound Rating A
- Die-formed, cold rolled steel housing is rigidly constructed
- Finished in high reflectance white powder-coat paint
- Integral grid clips

DIMENSIONS

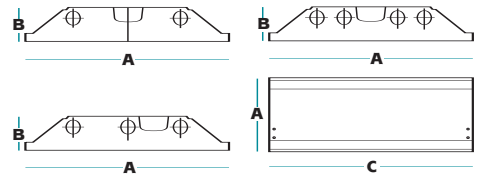

	A	B	C
2-LAMP	23.75"	4.0"	-
3-LAMP	23.75"	4.0"	-
4-LAMP	23.75"	4.0"	-
HOUSING	23.75"	-	48.0

ORDERING INFORMATION

Catalog Number	Voltage	# of Lamps	Lamp Type	Harmonic Level
UNLAMPED TROFFERS - ELECTRONIC				
R242B	120V ¹	2	F32T8	<20%
R243B	120V ¹	3	F32T8	<20%
R244B	120V ¹	4	F32T8	<20%

¹ For 277 volt, add **-277** to catalog number.

OPTIONS

Suffix	Description
L	Lamped (T8 mid-white, 3500K, 70+ CRI)
W	Whipped (6' flex, 3 #18, 1-STR & 1 90° connector - one circuit)

NOTE: Emergency lighting ballasts available. See E Series in Emergency & Exit section.

ACCESSORIES

(must be ordered separately)

Catalog Number	Description
GFK24S	2 x 4 Flange Kit
PF24	2 x 4 Plaster Frame (individual)
PF24EX	2 x 4 Plaster Frame (extension)



A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

www.securitylighting.com

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642